



The Signet 2650 Amperometric Electronics provide the polarization voltage and signal conditioning required by all Signet Amperometric Sensors. The 2650 Amperometric Electronics also relays important sensor information that is stored on a memory chip inside the sensor to be displayed on the 3-8630-3P transmitter. Information includes factory calibration data, service life, calibration information and more.

Signet's patented DryLoc® connector provides a quick and secure connection to the sensor. Gold-plated contacts and an O-ring seal ensure a waterproof and reliable interconnect to the sensor.

Sensor maintenance, replacement and troubleshooting has never been easier. The DryLoc electronics can be separated from the sensor, which allows the user to detect a faulty sensor, electronics or cable assembly.

Features

- Conditions the signal from the 263X sensor and provides sensor stored data to the Chlorine transmitter
- Patented DryLoc® connector provides a quick and secure connection to the sensor
- Waterproof and reliable interconnect to the sensor
- Easy sensor replacement without running new cable
- Easy sensor removal for servicing




Applications

Residual Chlorine Monitoring:

- Water Distribution
- Ground Water
- Surface Water
- HVAC Applications (cooling water)
- Gray Water Dechlorination
- Food and Beverage
- RO Membrane Protection
- Swimming Pools
- Aquariums
- Water Parks

U.S. Patent No.: 6,666,701

System Overview

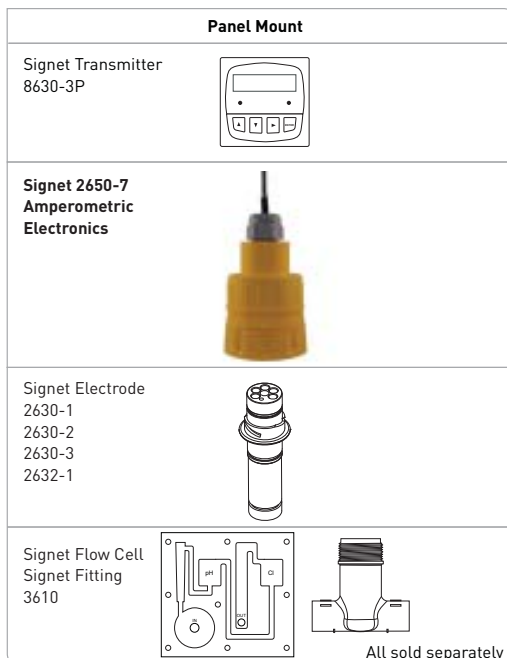


Tel: +44 (0) 1706 869777
 E-mail: sales@desal.co.uk
 Web: www.desal.co.uk

Specifications

General	
Compatibility	All Signet Amperometric DryLoc Sensors Signet 3-8630-3P Chlorine Transmitter All 3-4630 Chlorine panel assemblies
Mounting	DryLoc connection
Materials	Valox® (PBT)
Cable	4.6 m (15 ft) 3 conductor shielded, 22 AWG
Performance	
Electronics Accuracy	< 5 nA or 1% of reading, whichever is greater @ 25 °C over full input range
Temperature	±1.0 °C (PT1000) over full operation range (when calibrated at ambient temperature)
Update Rate	500 ms
Operational Range	±450 nA
Resolution	0.1 nA
Electrical	
Input Specifications	
Sensor	Raw signal
Temperature	PT1000 RTD
Output Specifications	
Digital (S ³ L)	Serial ASCII, TTL level 9600 bps
Max. Cable Length	30 m (100 ft)
Power Supply Input	Digital (S ³ L) mode 5 to 6.5 V ± 10%, 3 mA max.
Environmental	
Operating Temperature	0 °C to 85 °C 32 °F to 185 °F
Storage Temperature	-20 °C to 85 °C -4 °F to 185 °F
Relative Humidity	0 to 95%, non-condensing
Enclosure	NEMA 4X/IP65
Shipping Weight	
	0.64 kg 1.41 lb
Standards and Approvals	
	CE, FCC RoHS compliant, China RoHS Manufactured under ISO 9001 for Quality and ISO 14001 for Environmental Management and OHSAS 18001 for Occupational Health and Safety

Dimensions

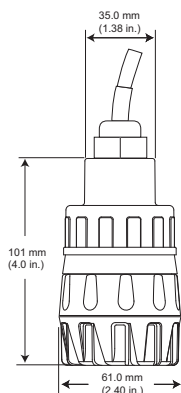

Ordering Information

Mfr. Part No.	Code	Description
3-2650-7	159 001 670	Amperometric in-line sensor electronics, Digital (S ³ L), 4.6 m (15 ft) cable

* Valox® is a registered trademark of SABIC Innovative Plastics

3-2650.099 Rev G (09/13)

© Georg Fischer Signet LLC

3401 Aero Jet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057 • www.gfsignet.com • e-mail: signet.ps@georgfischer.com
Specifications subject to change without notice. All rights reserved. All corporate names and trademarks stated herein are the property of their respective companies.