



Tel: +44 (0) 1706 869777  
 E-mail: [sales@desal.co.uk](mailto:sales@desal.co.uk)  
 Web: [www.desal.co.uk](http://www.desal.co.uk)

## AMBERLITE™ IRA402 CI

Industrial Grade Strong Base Anion Exchanger

### Introduction

AMBERLITE IRA402 CI resin is a type 1 strongly basic, clear gel, anion exchange resin. It has a crosslinked polystyrene structure that is designed to give an optimum balance of capacity and regeneration efficiency in water treatment applications. It is widely used in co-flow regenerated systems and can also be used in conventional counterflow systems such as those using air or water holddown. In demineralisation applications AMBERLITE IRA402 CI resin can remove both strong and weak acids including silica. These characteristics make AMBERLITE IRA402 CI an excellent general purpose anion exchange resin for a wide variety of water treatment applications.

### Properties

|                           |  |
|---------------------------|--|
| Physical form             | Pale yellow translucent spherical beads      |
| Matrix                    | Styrene divinylbenzene copolymer             |
| Functional group          | Trimethyl ammonium                           |
| Ionic form as shipped     | Chloride                                     |
| Total exchange capacity   | ≥ 1.20 eq/L (Cl <sup>-</sup> form)           |
| Moisture holding capacity | 49 to 60 % (Cl <sup>-</sup> form)            |
| Shipping weight           | 670 g/L                                      |
| Particle size             |  |
| Uniformity coefficient    | ≤ 1.6  |
| Harmonic mean size        | 0.600 to 0.750 mm<br>< 0.300 mm<br>1.0 % max |
| Reversible swelling       | Cl <sup>-</sup> → OH <sup>-</sup> ≤ 30 %     |

### Suggested Operating Conditions

|                               |                                |
|-------------------------------|--------------------------------|
| Maximum operating temperature | 60 °C                          |
| Minimum bed depth             | 700 mm                         |
| Service flow rate             | 8 to 40 BV*/h                  |
| Regeneration                  |                                |
| Regenerant                    | NaOH                           |
| Level                         | 60 to 150 g/L                  |
| Concentration                 | 2 to 4 %                       |
| Minimum contact time          | 30 minutes                     |
| Slow rinse                    | 2 BV at regeneration flow rate |
| Fast rinse                    | 4 to 8 BV at service flow rate |

### Limits of use

AMBERLITE IRA402 CI resin is suitable for industrial uses. For all other specific applications such as pharmaceutical, food processing or potable water applications, it is recommended that all potential users seek advice from Rohm and Haas in order to determine the best resin choice and optimum operating conditions.

## Hydraulic Characteristics

Figure 1 shows the bed expansion of AMBERLITE IRA402 CI resin as a function of backwash flow rate and water temperature.

Figure 2 shows the pressure drop data for AMBERLITE IRA402 CI resin, as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with clear water and a correctly classified bed.

Fig. 1 : Bed Expansion


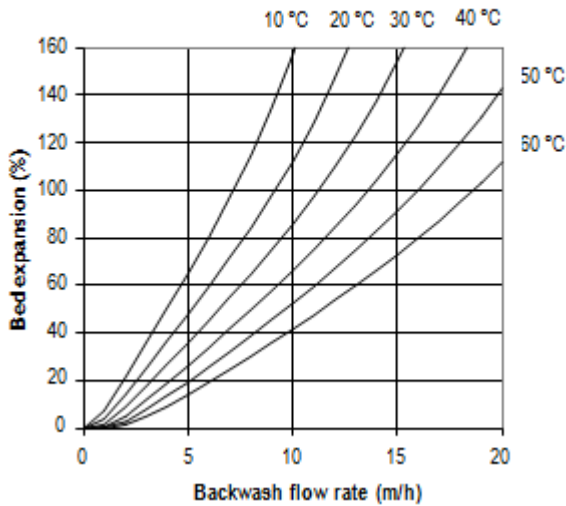


Fig. 2 : Pressure Drop

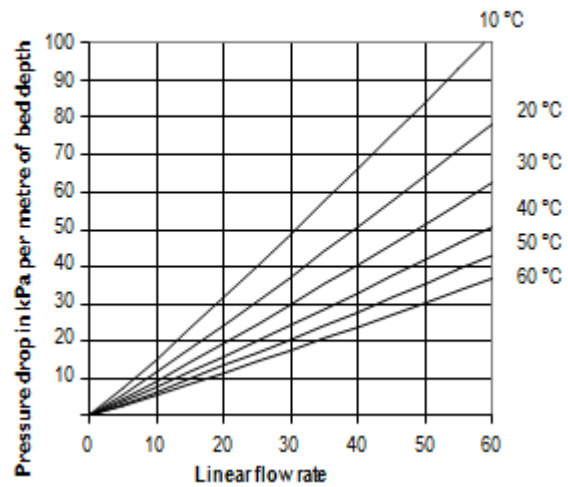

**For more information about DOW™ resins, call the Dow Water & Process Solutions business:**

North America: 1-800-447-4369  
 Latin America: (+55) 11-5188-9222  
 Europe: +800-3-694-6367  
 Italy: +800-783-825  
 South Africa: +0800 99 5078  
 Pacific: +8007776 7776  
 China: +400 889-0789

<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

