



Tel: +44 (0) 1706 869777
 E-mail: sales@desal.co.uk
 Web: www.desal.co.uk

AMBERLITE™ IRN150

Nuclear Grade Mixed Bed Resin

Introduction

AMBERLITE IRN150 resin is a mixture of uniform particle size gel polystyrene cation and anion exchange resins. AMBERLITE IRN150 resin as supplied contains a stoichiometric equivalent of the strongly acidic cation and the strongly basic anion exchange resins. It is supplied in the fully regenerated H⁺/OH⁻ form. The resin combines the properties of high capacity and excellent physical strength.

Properties

Physical form	Spherical beads	
Matrix	Styrene divinylbenzene copolymer	
Shipping weight	690 g/L	
	Cation resin	Anion resin
Functional group	Sulphonic acid	Trimethylammonium
Ionic form as shipped	H ⁺	OH ⁻
Total exchange capacity	≥ 1.90 eq/L (H ⁺ form)	≥ 1.20 eq/L (OH ⁻ form)
Moisture holding capacity	49 to 55 % (H ⁺ form)	54 to 60 % (OH ⁻ form)
Particle size		
Harmonic mean size	0.600 to 0.700 mm	0.580 to 0.680 mm
Uniformity coefficient	≤ 1.2 (for each component) < 0.300 mm 0.2 % max ≥ 95 %	
Whole beads	≥ 350 g/bead	
Breaking weight (average)	≥ 95 % > 200 g/bead ≥ 99 % H ⁺	≥ 95 % OH ⁻
Ionic conversion		
CO ₃ ⁻	≤ 5 %	
Cl ⁻	≤ 0.1 %	
SO ₄ ⁻	≤ 0.1 %	

Suggested Operating Conditions

Maximum operating temperature	60 °C
Minimum bed depth	800 mm
Service flow rate	8 to 50 BV*/h
Maximum Service velocity	60 m/h

Purity

AMBERLITE IRN150 resin is designated as a nuclear grade resin and is manufactured using special processing procedures. These procedures, combined with a Rohm and Haas process to reduce the chloride content of the anion component, produce material of the ultimate purity and yield a product meeting the exacting demands of the nuclear industry.

AMBERLITE IRN150 resin is recommended in any non-regenerable mixed bed application where reliable production of the highest quality water is required and where the "as supplied" resin must have an absolute minimum of ionic and non-ionic contamination.

Purity	Cation	Anion
Al	≤ 50	≤ 50
Ca	≤ 50	≤ 50
Co	≤ 30	≤ 30
Cu	≤ 10	≤ 10
Fe	≤ 50	≤ 50
Hg	≤ 20	≤ 20
K	≤ 40	≤ 40
Mg	≤ 50	≤ 50
Na	≤ 50	≤ 20
Pb	≤ 10	≤ 10
Total Cl		≤ 500
SiO ₂		≤ 100
Total SO ₄		≤ 600


Applications

The purity and physical stability of AMBERLITE IRN150 resin provides unsurpassed performance in nuclear applications such as decontamination of primary water. AMBERLITE IRN150 resin can also be used for a variety of radwaste applications.

Hydraulic Characteristics

Pressure drop

The approximate pressure drop for each meter of bed depth of AMBERLITE IRN150 resin in normal downflow operation at various temperatures and flow rates is shown in the graph below.

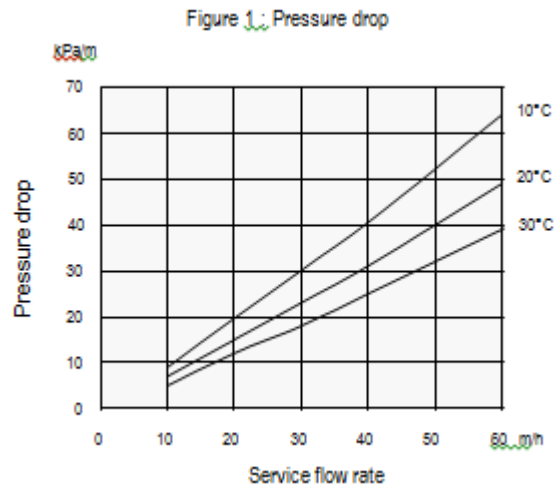

Resin Handling

To maintain the high purity of nuclear grade resins, deionized water should be used for all resin handling. Contact of the resin with air should also be minimized to avoid CO₂ pickup and subsequent loss of capacity of the anion resin.

**For more information about DOW™
resins, call the Dow Water & Process
Solutions business:**

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: +800-3-694-6367
Italy: +800-783-825
South Africa: +0800 99 5078
Pacific: +8007776 7776
China: +400 889-0789

<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

